


AK27 Hitch Lock Fitting Instructions



1. When the trailer is unhitched lift the handle and insert the dummy ball, until it clicks into position and releases the handle.

Caution: Take care not to pinch fingers

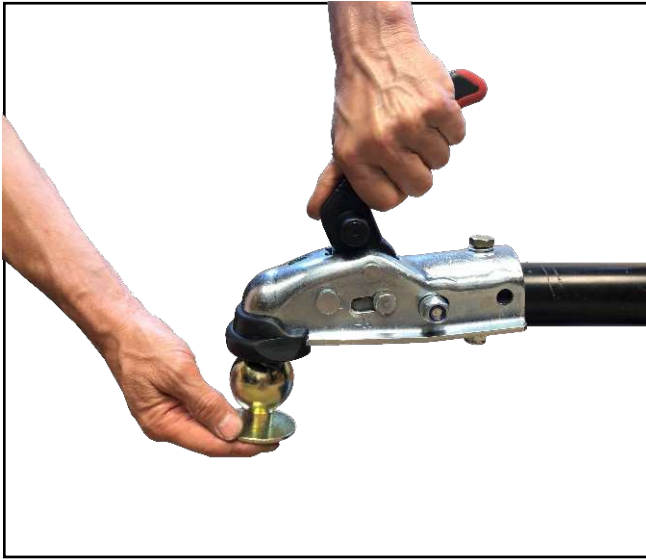

2. Lower the cover over the hitch



3. Insert the lock bolt through both holes of the cover. Fit the recessed cup over the end of the lock bolt, then turn the key a quarter turn clockwise to lock and remove key.



We have taken every care in the design and manufacture of this security device and we believe that it is an effective deterrent. However we cannot guarantee that it will resist the efforts of the most determined thief and as such we do not accept any liability for loss or damage caused by theft, vandalism or other illegal activity against property to which this device is fitted.

Bulldog Security Products

Units 1 - 4 Stretton Road, Much Wenlock, Shropshire, TF13 6DH.

Tel: 01952 728171

Email sales@bulldogsecure.com www.bulldogsecure.com

Lock Lubrication.

IMPORTANT - To ensure free movement of the lock, spray lock mechanism & ballbearings with WD40 (or equivalent) minimum every four months.